

IDRA II
SPEC
SHEET

CONTENTS

DIMENSIONS AND WEIGHT P. 3

WHAT'S INCLUDED P. 3

PC SPECS REQUIREMENTS P. 4

POSITIONING SPECIFICATIONS P. 5

DIMENSIONS AND WEIGHT



WEIGHT: 14.4 LBS

- A** WIDTH: 13 5/16"
- B** HEIGHT: 7 1/4"
- C** DEPTH: 9 5/8"

Ensure that you have sufficient space to comfortably swing your club in your chosen area.

WHAT'S INCLUDED

- IDRA II camera
- Calibration board
- IDRA II ceiling mount
- Wireless remote control outlet (Only included in North America)
- 1/2" drywall plastic toggle anchors (4)
- 1" head Phillips/square drive screws (4)
- 3" head Phillips/square drive screws (4)
- 2 years warranty

PC SPECS REQUIREMENTS

WITH GSPRO

Processor

Minimum

Intel Core i7, 10th Gen, with at least 16 logical processors

Recommended for 4K

Intel Core i7, 10th Gen or newer, with at least 24 logical processors

Storage

Minimum

512 GB

Recommended for 4K

1 TB

USB Ports

2 USB 3.0 & 1 USB-C ports are required

GPU

Minimum

Nvidia GeForce RTX 2060 series

Recommended for 4K

Nvidia GeForce RTX 4070 series or newer

RAM memory

Minimum

16 GB

Recommended for 4K

32 GB

Internet

Required

WITH E6 CONNECT

Processor

Minimum & recommended

Intel Core i7, 10th Gen or newer, with at least 16 logical processors

Storage

Minimum & recommended

512 GB

USB Ports

2 USB 3.0 & 1 USB-C ports are required

GPU

Minimum

Nvidia GeForce RTX 20 series

Recommended

Nvidia GeForce RTX 30 series

RAM memory

Minimum & recommended

16 GB

Internet


High speed internet is required



WARNING

- AMD processors & GPUS are NOT supported.
- DO NOT use USB cable extension between your PC and your IDRA II camera.

POSITIONING SPECIFICATIONS

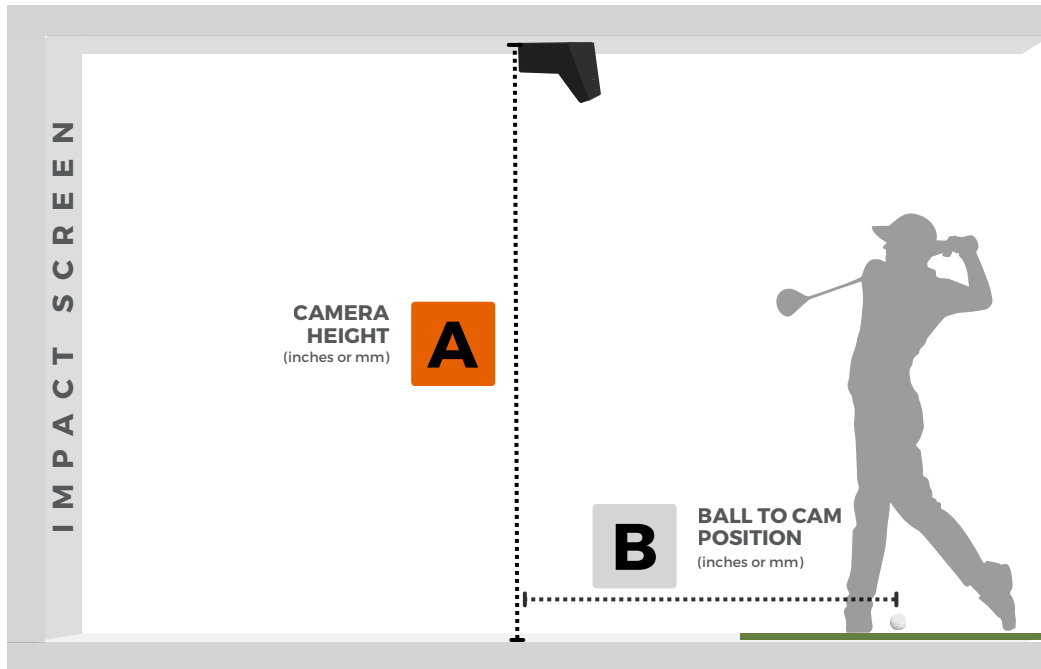

A		B	
Camera Height (inches)	Camera Height (mm)	Ball to cam position (inches)	Ball to cam position (mm)
99	2515	52	1320
100	2540	52 1/2	1333
101	2565	53	1346
102	2591	53 1/2	1360
103	2616	54	1373
104	2642	54 5/8	1386
105	2667	55 1/8	1400
106	2692	55 5/8	1413
107	2718	56 1/8	1426
108	2743	56 5/8	1440
109	2769	57 1/4	1453
110	2794	57 3/4	1466
111	2819	58 1/4	1479
112	2845	58 3/4	1493
113	2870	59 1/4	1506
114	2896	59 7/8	1519
115	2921	60 3/8	1533
116	2946	60 7/8	1546
117	2972	61 3/8	1559
118	2997	61 7/8	1573
119	3023	62 1/2	1586
120	3048	63	1599

The PC must be positioned within a maximum of 25 feet from IDRA II.